

Point dia.	Shank dia.	Overall length	Point length
Dc	Ds	L	ℓ ₁

JIS

PE-S

Point Drills 60°



Specification


HSS

■ PE-S is the point drill enabling positioning (125° edge angle) and chamfering (60°) simultaneously. High cutting accuracy is available owing to a good cutting-start due to 2 step flat design.

Cutting Speed depending on Materials

Low carbon steels 低炭素鋼 30~40 (m/min)	Medium carbon steels 中炭素鋼 25~35 (m/min)	High carbon steels 高炭素鋼 20~30 (m/min)	Alloy steels 合金鋼 20~25 (m/min)	Stainless steels ステンレス鋼 10~15 (m/min)	Cast irons 鑄鉄 30~40 (m/min)	Aluminum alloy castings アルミ合金鋳物 70~100 (m/min)
--	---	---	--	---	---	--

TYPE: 1

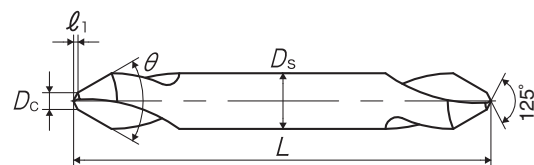

Segment : 56

Size Ds × Dc × θ	Code	Dc (mm)	Ds (mm)	L (mm)	ℓ ₁ (mm)	TYPE	MSRP
3 × 0.5 × 60°	PE3.0S	0.5	3	40	0.13	1	¥ 2,930
4 × 1 × 60°	PE4.0S	1	4	45	0.26	1	¥ 2,380
6 × 2 × 60°	PE6.0S	2	6	55	0.52	1	¥ 2,260
8 × 2.5 × 60°	PE8.0S	2.5	8	65	0.65	1	¥ 2,710
10 × 3 × 60°	PE010S	3	10	75	0.78	1	¥ 4,050
12 × 3.5 × 60°	PE012S	3.5	12	85	0.91	1	¥ 5,330
16 × 4 × 60°	PE016S	4	16	90	1.04	1	¥ 9,090
20 × 5 × 60°	PE020S	5	20	100	1.30	1	¥ 13,600

- ① Spiral Fluted Taps (for blind hole)
- ② Spiral Fluted Taps (for through hole)
- ③ Spiral Pointed Taps (for through hole)
- ④ Hand Taps
- ⑤ Cemented Carbide Taps
- ⑥ Roll Taps
- ⑦ Special Thread Taps (Simple inspection tools)
- ⑧ Pipe Taps
- ⑨ Thread Mills (Premium Thread Mills)
- ⑩ Dies
- ⑪ Center Drills / Centering Tools
- ⑫ Precision Machinery / Metal / Surgical Instruments