

# 1 Spiral Fluted Tap Series for blind hole

Overall length	Thread length	Thread + Neck length	Shank length	Shank dia.	Size of square	Length of square
L	ℓ	ℓn	ℓs	Ds	K	ℓk

- ① Spiral Fluted Taps (for blind hole)
- ② Spiral Fluted Taps (for through hole)
- ③ Spiral Pointed Taps (for through hole)
- ④ Hand Taps
- ⑤ Cemented Carbide Taps
- ⑥ Roll Taps
- ⑦ Special Thread Taps (Simple inspection tools)
- ⑧ Pipe Taps
- ⑨ Thread Mills (Premium Thread Mills)
- ⑩ Dies
- ⑪ Center Drills (Centering Tools)
- ⑫ Precision Machinery/ Medical Surgical Instruments




## HDISP

For Dry Tapping, Blind Hole Use. Spiral Fluted Taps for Steels



### Specification

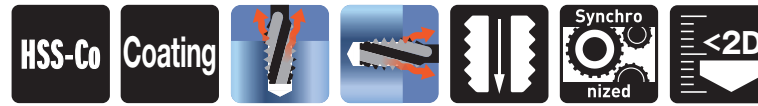

### Tapping Speeds depending on Materials

Medium carbon steels 中炭素鋼	High carbon steels 高炭素鋼	Alloy steels 合金鋼
10~20 (m/min)	10~20 (m/min)	10~20 (m/min)


### Product Features

- Designed with a through center hole for coolant lubrication, mist lubrication or air blast applications in blind holes.
- The low helix flutes, making it the optimum tap for blind hole tapping on horizontal and vertical machines in materials such as carbon steel and alloy steel.


### Tapping Data

#### Tapping Condition [P4 M10×1.25]

Work Piece Material	S50C (18HRC)
Bored Hole Shape	Blind hole
Bored Hole Size	φ8.8
Tapping Length	12mm
Tapping Speed	8m/min
Machinery Type	CNCtapping machine
Cutting Fluid	Dry (Without tapping fluid)
Number of Holes Processed	380


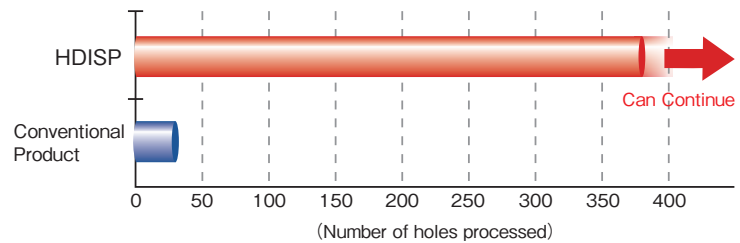


### Speed chart

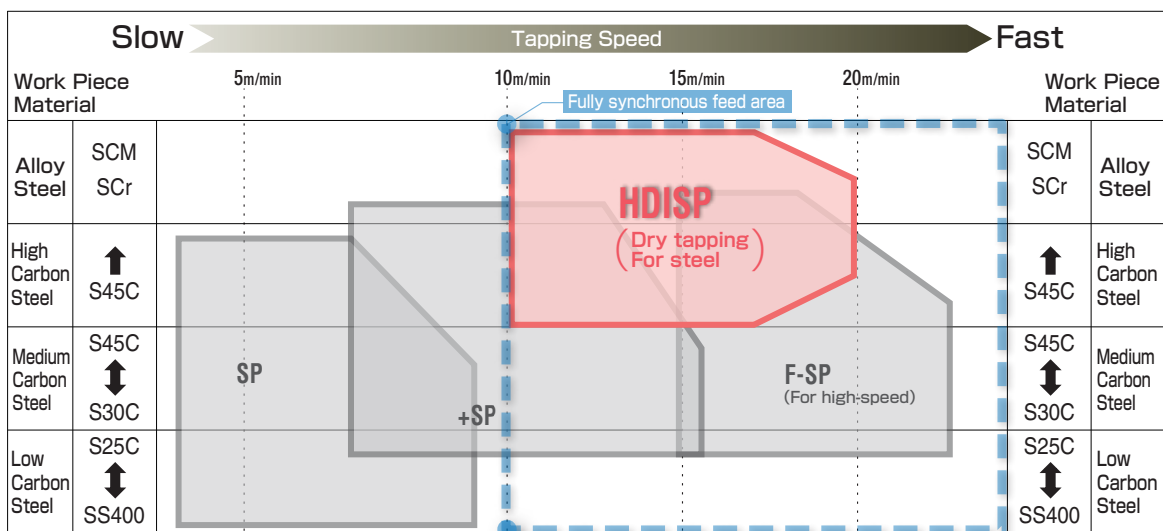

Tapping range by material being cut.

Overall length	Thread length	Thread + Neck length	Shank length	Shank dia.	Size of square	Length of square
L	ℓ	ℓ <sub>n</sub>	ℓ <sub>s</sub>	D <sub>s</sub>	K	ℓ <sub>k</sub>

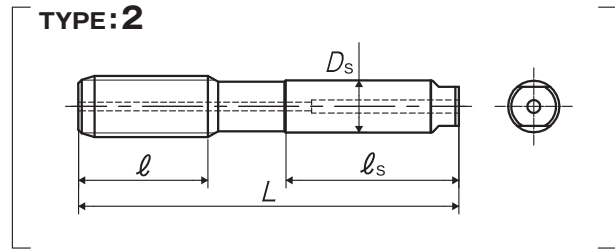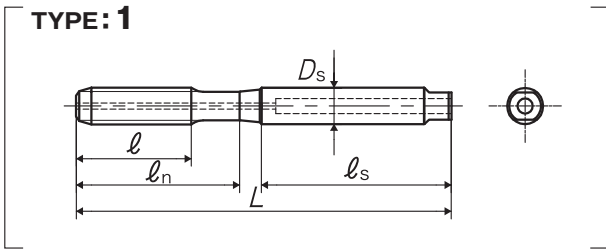

Segment : 1D

Size	Class	Code	Chamfer	L (mm)	ℓ (mm)	ℓ <sub>n</sub> (mm)	ℓ <sub>s</sub> (mm)	D <sub>s</sub> (mm)	K (mm)	ℓ <sub>k</sub> (mm)	No. of flutes	TYPE	MSRP
For Metric Threads													
M6 × 1	P4	HDISPS6.0M	2.5P	62	19	27	32	6	-	-	3	1	¥ 5,040
M8 × 1.25	P4	HDISPS8.0N	2.5P	70	22	-	36	8	-	-	3	2	¥ 7,410
M10 × 1.5	P4	HDISPS010O	2.5P	75	24	-	37	10	-	-	3	2	¥ 9,380
M10 × 1.25	P4	HDISPS010N	2.5P	75	24	-	37	10	-	-	3	2	¥ 9,380
M10 × 1	P4	HDISPS010M	2.5P	75	24	-	37	10	-	-	3	2	¥ 11,300
M12 × 1.75	P4	HDISPS012P	2.5P	82	29	-	40	12	-	-	3	2	¥ 13,400
M12 × 1.5	P4	HDISPS012O	2.5P	82	29	-	40	12	-	-	3	2	¥ 13,400
M12 × 1.25	P4	HDISPS012N	2.5P	82	29	-	40	12	-	-	3	2	¥ 13,400
M14 × 1.5	P4	HDISPS014O	2.5P	88	30	-	40	12	-	-	3	2	¥ 18,300
M16 × 1.5	P4	HDISPS016O	2.5P	95	32	-	43	16	-	-	3	2	¥ 24,100
M18 × 1.5	P4	HDISPS018O	2.5P	100	37	-	45	16	-	-	4	2	¥ 34,200
M20 × 1.5	P5	HDISPT020O	2.5P	105	37	-	45	16	-	-	4	2	¥ 44,600

Note:

- There is no shank square. Use a holder with high holding force like a milling chuck. • The back end of the HDISP shank has a tongue drive design. If the tool holder only grips on the back end of the HDISP shank tongue drive, the coolant may leak.

1

JIS

Spiral Fluted Taps  
(for blind hole) ①

Spiral Fluted Taps  
(for through hole) ②

Spiral Pointed Taps  
(for through hole) ③

Hand Taps ④

Cemented Carbide Taps ⑤

Roll Taps ⑥

Special Thread Taps  
Simple Inspection Tools ⑦

Pipe Taps ⑧

Thread Mills  
Premium Thread Mills ⑨

Dies ⑩

Center Drills  
Centering Tools ⑪

Precision Machinery/  
Metal Surgical Instruments ⑫

JIS

①-214