

Overall length	Thread length	Thread + Neck length	Shank dia.	Size of square	Length of square
L	ℓ	ℓ _n	D _s	K	ℓ _k

ANSI

ZELX TI LHSP

Spiral Fluted Taps for Titanium Alloys, Through Hole Use (with LH Spiral Flutes)







Specification



■ Suitable for titanium alloys which, including titanium as the main composition, are tough, light and heat resistant.

Tapping Speed depending on Materials

Titanium alloys
チタン合金
5~10
(m/min)

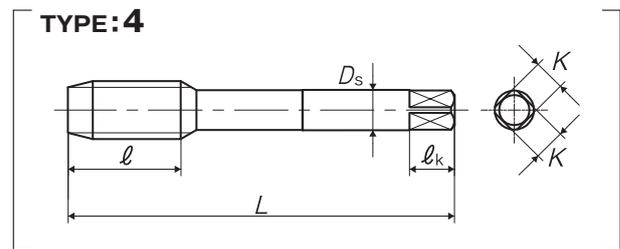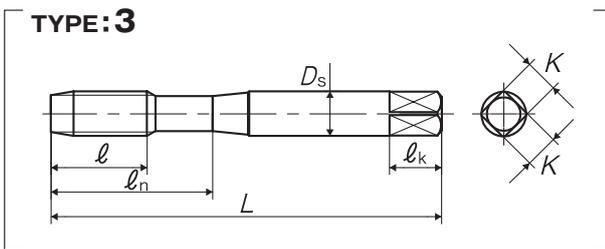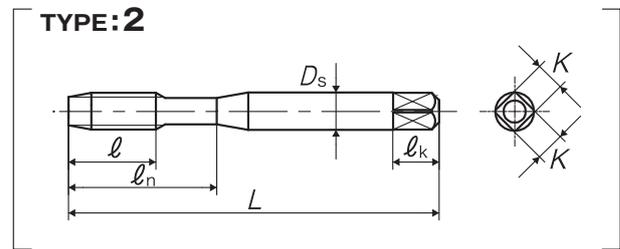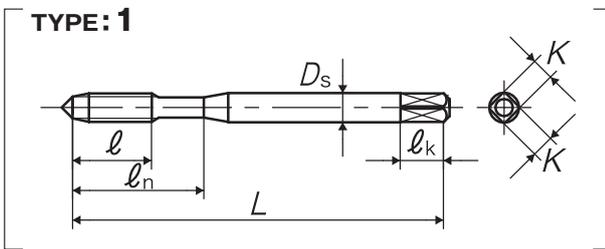

Segment : 1T

Size	Class	Code	Chamfer	L (inch)	ℓ (inch)	ℓ _n (inch)	D _s (inch)	K (inch)	ℓ _k (inch)	No. of flutes	TYPE
For Metric Threads											
M2.5 × 0.45	D3	Y85700	5P	1.812	0.295	0.5	0.141	0.11	0.187	3	1
M3 × 0.5	D3	Y85701	5P	1.937	0.374	0.625	0.141	0.11	0.187	3	1
M3.5 × 0.6	D4	Y85702	5P	2	0.413	0.687	0.141	0.11	0.187	3	1
M4 × 0.7	D4	Y85703	5P	2.125	0.453	0.75	0.168	0.131	0.25	3	1
M5 × 0.8	D4	Y85704	5P	2.375	0.531	0.875	0.194	0.152	0.25	3	1
M6 × 1	D5	Y85705	5P	2.5	0.591	1	0.255	0.191	0.312	3	2
M7 × 1	D5	Y85706	5P	2.718	0.669	1.125	0.318	0.238	0.375	3	3
M8 × 1.25	D5	Y85708	5P	2.718	0.669	1.125	0.318	0.238	0.375	3	3
M8 × 1	D5	Y85707	5P	2.718	0.669	1.125	0.318	0.238	0.375	3	3
M10 × 1.5	D6	Y85710	5P	2.937	0.748	1.25	0.381	0.286	0.437	3	3
M10 × 1.25	D5	Y85709	5P	2.937	0.748	1.25	0.381	0.286	0.437	3	3
M12 × 1.75	D6	Y85712	5P	3.375	0.984	-	0.367	0.275	0.437	3	4
M12 × 1.25	D5	Y85711	5P	3.375	0.984	-	0.367	0.275	0.437	3	4
For Unified Threads											
No.2-56UNC	GH2	Y85623	5P	1.75	0.256	0.437	0.141	0.11	0.187	3	1
No.4-40UNC	GH2	Y85601	5P	1.875	0.335	0.562	0.141	0.11	0.187	3	1
No.5-40UNC	GH2	Y85603	5P	1.937	0.374	0.625	0.141	0.11	0.187	3	1

2 Spiral Fluted Tap Series for through hole

Overall length	Thread length	Thread + Neck length	Shank dia.	Size of square	Length of square
L	ℓ	ℓn	Ds	K	ℓk

ANSI

ZELX TI LHSP Spiral Fluted Taps for Titanium Alloys, Through Hole Use (with LH spiral flutes)

Size	Class	Code	Chamfer	L (inch)	ℓ (inch)	ℓn (inch)	Ds (inch)	K (inch)	ℓk (inch)	No. of flutes	TYPE
No.6-32UNC	GH3	Y85605	5P	2	0.413	0.687	0.141	0.11	0.187	3	1
No.6-32UNC	GH5	Y85635	5P	2	0.413	0.687	0.141	0.11	0.187	3	1
No.8-32UNC	GH3	Y85607	5P	2.125	0.453	0.75	0.168	0.131	0.25	3	1
No.8-32UNC	GH4	Y85629	5P	2.125	0.453	0.75	0.168	0.131	0.25	3	1
No.8-32UNC	GH5	Y85637	5P	2.125	0.453	0.75	0.168	0.131	0.25	3	1
No.8-32UNC	GH6	Y85660	5P	2.125	0.453	0.75	0.168	0.131	0.25	3	1
No.8-32UNC	GH7	Y85667	5P	2.125	0.453	0.75	0.168	0.131	0.25	3	1
No.10-24UNC	GH3	Y85609	5P	2.375	0.531	0.875	0.194	0.152	0.25	3	1
No.10-24UNC	GH5	Y85639	5P	2.375	0.531	0.875	0.194	0.152	0.25	3	1
No.10-32UNF	GH3	Y85610	5P	2.375	0.531	0.875	0.194	0.152	0.25	3	1
No.10-32UNF	GH4	Y85630	5P	2.375	0.531	0.875	0.194	0.152	0.25	3	1
No.10-32UNF	GH5	Y85640	5P	2.375	0.531	0.875	0.194	0.152	0.25	3	1
No.10-32UNF	GH6	Y85661	5P	2.375	0.531	0.875	0.194	0.152	0.25	3	1
No.10-32UNF	GH7	Y85670	5P	2.375	0.531	0.875	0.194	0.152	0.25	3	1
1/4-20UNC	GH3	Y85613	5P	2.5	0.591	1	0.255	0.191	0.312	3	2
1/4-20UNC	GH5	Y85643	5P	2.5	0.591	1	0.255	0.191	0.312	3	2
1/4-28UNF	GH3	Y85614	5P	2.5	0.591	1	0.255	0.191	0.312	3	2
1/4-28UNF	GH4	Y85631	5P	2.5	0.591	1	0.255	0.191	0.312	3	2
1/4-28UNF	GH5	Y85644	5P	2.5	0.591	1	0.255	0.191	0.312	3	2
1/4-28UNF	GH6	Y85662	5P	2.5	0.591	1	0.255	0.191	0.312	3	2
1/4-28UNF	GH7	Y85674	5P	2.5	0.591	1	0.255	0.191	0.312	3	2
5/16-18UNC	GH3	Y85615	5P	2.718	0.669	1.125	0.318	0.238	0.375	3	3
5/16-18UNC	GH5	Y85645	5P	2.718	0.669	1.125	0.318	0.238	0.375	3	3
5/16-24UNF	GH3	Y85616	5P	2.718	0.669	1.125	0.318	0.238	0.375	3	3
5/16-24UNF	GH4	Y85632	5P	2.718	0.669	1.125	0.318	0.238	0.375	3	3
5/16-24UNF	GH5	Y85646	5P	2.718	0.669	1.125	0.318	0.238	0.375	3	3
5/16-24UNF	GH6	Y85663	5P	2.718	0.669	1.125	0.318	0.238	0.375	3	3
5/16-24UNF	GH7	Y85676	5P	2.718	0.669	1.125	0.318	0.238	0.375	3	3
3/8-16UNC	GH3	Y85617	5P	2.937	0.748	1.25	0.381	0.286	0.437	3	3
3/8-16UNC	GH5	Y85647	5P	2.937	0.748	1.25	0.381	0.286	0.437	3	3
3/8-24UNF	GH3	Y85618	5P	2.937	0.748	1.25	0.381	0.286	0.437	3	3
3/8-24UNF	GH4	Y85633	5P	2.937	0.748	1.25	0.381	0.286	0.437	3	3
3/8-24UNF	GH5	Y85648	5P	2.937	0.748	1.25	0.381	0.286	0.437	3	3
3/8-24UNF	GH6	Y85664	5P	2.937	0.748	1.25	0.381	0.286	0.437	3	3
3/8-24UNF	GH7	Y85678	5P	2.937	0.748	1.25	0.381	0.286	0.437	3	3
7/16-14UNC	GH3	Y85619	5P	3.156	0.866	-	0.323	0.242	0.406	3	4
7/16-14UNC	GH5	Y85649	5P	3.156	0.866	-	0.323	0.242	0.406	3	4
7/16-20UNF	GH3	Y85620	5P	3.156	0.866	-	0.323	0.242	0.406	3	4
7/16-20UNF	GH5	Y85650	5P	3.156	0.866	-	0.323	0.242	0.406	3	4
1/2-13UNC	GH3	Y85621	5P	3.375	0.984	-	0.367	0.275	0.437	3	4
1/2-13UNC	GH5	Y85651	5P	3.375	0.984	-	0.367	0.275	0.437	3	4
1/2-20UNF	GH3	Y85622	5P	3.375	0.984	-	0.367	0.275	0.437	3	4
1/2-20UNF	GH5	Y85652	5P	3.375	0.984	-	0.367	0.275	0.437	3	4
5/8-11UNC	GH3	Y85625	5P	3.812	1.083	-	0.48	0.36	0.562	3	4
5/8-18UNF	GH3	Y85626	5P	3.812	1.083	-	0.48	0.36	0.562	3	4
3/4-10UNC	GH3	Y85627	5P	4.25	1.201	-	0.59	0.442	0.687	3	4
3/4-16UNF	GH3	Y85628	5P	4.25	1.201	-	0.59	0.442	0.687	3	4

1 Spiral Fluted Taps (for blind hole)

2 Spiral Fluted Taps (for through hole)

3 Spiral Pointed Taps (for through hole)

4 Hand Taps

5 Cemented Carbide Taps

6 Roll Taps

7 Special Thread Taps Simple inspection tools

8 Pipe Taps

9 Thread Mills Premium Thread Mills

10 Dies

11 Center Drills Centering Tools

12 Precision Machinery/ Medical Surgical Instruments

ANSI



This product is different from JIS products in shape and dimensions, please be careful when using.