

Overall length	Chamfer+ full thread	Thread length	Thread + Neck length	Shank length	Shank dia.	Size of square	Length of square
L	ℓt	l	ℓn	ls	Ds	K	<i>l</i> k

JIS

piral Fluted Tap

piral Fluted Taps

Spiral Pointed Tap

emented ide Taps

(9)
Roll Taps

Special Thread Taps

8) Pipe Tap

Thread Mills

10

Center Drills
Centering Tools

Precision Machinery/ ledical Surgical Instruments **ZEN-B**



Spiral Fluted Taps for Nickel Base Alloys

Specification









Tapping Speeds depending on Materials










Product Features

- The tap is produced from a high grade powder high speed steel that is excellent for heat resistance and wear resistance.
- The optimum thread relief is adopted in consideration of the shrinkage and cutting heat for Nickel Base Alloys.
- ●The ZEN-B has a flute design for nickel base alloy to smooth the discharge of chips.
- Optimum surface treatment is applied to prevent welding.
- Considering the shrinkage of the internal screw thread, the tap is produced to a moderate oversize condition.

Tapping Data

Tapping Conditions [M6×1]

Work Piece Material	Hastelloy C-276
Bored Hole Size	φ5.0
Tapping Length	10mm
Tapping Speed	5m/min
Machinery Type	CNC tapping center
Tapping Fluid	Water soluble cutting fluid

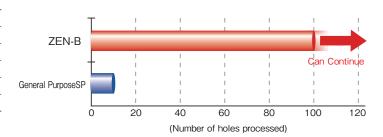

Characteristics of nickel base alloys

Nickel based alloys have much better corrosion and heat resistance than steel. In general, nickel based alloys are much more difficult to process than steels and stainless steels. Nickel based alloys include A286, inconels, hastelloys, waspaloys and more. There are many kinds of nickel based alloys, but one of the more difficult ones to cut is inconel 718.

Types of tapping problems


- Nickel based alloys have high temperature strength and the thermal diffusivity is small so, abrupt abrasion occurs on the tap.
- ●The material tends to spring back so, internal threads may shrink or the tap may be crimped causing breakage.
- The material tends to cause welding on the cutting chamfer and the thread flank surface. The finished surface of the internal screw thread can become rough.







Overall length	Chamfer+ full thread	Thread length	Thread + Neck length	Shank length	Shank dia.	Size of square	Length of square
L	ℓt	l	ℓn	ls	Ds	K	lk



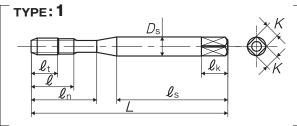

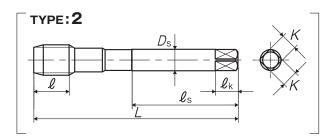

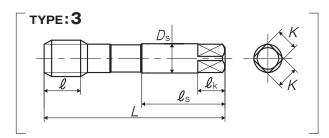

Segment: 1D

Segment: 1D														
Size	Class	Code	Chamfer	L (mm)	ℓt (mm)	ℓ (mm)	ℓn (mm)	ℓs (mm)	Ds (mm)	K (mm)	ℓk (mm)	No. of flutes	TYPE	MSRP
For Metric Threads														
$M3 \times 0.5$	P2	ZENBMQ3.0G	3P	46	5	9	14	26	4	3.2	6	3	1	¥ 2,880
$M4 \times 0.7$	P3	ZENBMR4.0I	3P	52	7	11	17	29	5	4	7	3	1	¥ 2,880
$M5 \times 0.8$	P3	ZENBMR5.0K	3P	60	9	13	22	33	5.5	4.5	7	3	1	¥ 2,900
M6 × 1	P3	ZENBMR6.0M	3P	62	11	15	26	33	6	4.5	7	3	1	¥ 3,200
M8 × 1.25	P3	ZENBMR8.0N	3P	70	-	12	-	36	6.2	5	8	3	2	¥ 4,460
M10 × 1.5	P3	ZENBMR010O	3P	75	-	13	-	38	7	5.5	8	3	2	¥ 5,670
$M10 \times 1.25$	P3	ZENBMR010N	3P	75	-	13	-	38	7	5.5	8	3	2	¥ 5,670
$M12 \times 1.75$	P3	ZENBMR012P	3P	82	-	15	-	42	8.5	6.5	9	3	2	¥ 8,030
$M12 \times 1.5$	P3	ZENBMR012O	3P	82	-	15	-	42	8.5	6.5	9	3	2	¥ 8,030
$M12 \times 1.25$	P3	ZENBMR012N	3P	82	-	15	-	42	8.5	6.5	9	3	2	¥ 8,030
M14 × 2	P3	ZENBMR014Q	3P	88	-	18	-	45	10.5	8	11	3	2	¥ 11,000
$M14 \times 1.5$	P3	ZENBMR014O	3P	88	-	14	-	45	10.5	8	11	3	2	¥ 11,000
M16 × 2	P3	ZENBMR016Q	3P	95	-	18	-	48	12.5	10	13	3	2	¥ 14,800
M16 × 1.5	P3	ZENBMR016O	3P	95	-	14	-	48	12.5	10	13	3	2	¥ 14,800
$M18 \times 2.5$	P4	ZENBMS018R	3P	100	-	20	-	51	14	11	14	4	2	¥ 19,700
M18 × 1.5	P3	ZENBMR018O	3P	100	-	14	-	51	14	11	14	4	2	¥ 19,700
$M20 \times 2.5$	P4	ZENBMS020R	3P	105	-	20	-	50	15	12	15	4	3	¥ 26,700
$M20 \times 1.5$	P4	ZENBMS020O	3P	105	-	14	-	50	15	12	15	4	3	¥ 26,700
				For I	Jnified	Threac	ds							
No.4-40UNC	P2	ZENBMQUN4H	3P	46	5	9	14	25	4	3.2	6	3	1	¥ 3,630
No.6-32UNC	P3	ZENBMRUN6J	3P	52	7	11	17	27	5	4	7	3	1	¥ 3,380
No.8-32UNC	P3	ZENBMRUN8J	3P	60	7	13	22	31	5.5	4.5	7	3	1	¥ 3,400
No.10-24UNC	P3	ZENBMRUNAM	3P	60	9	13	22	32	5.5	4.5	7	3	1	¥ 3,400
No.10-32UNF	P3	ZENBMRUNAJ	3P	60	9	13	22	32	5.5	4.5	7	3	1	¥ 3,400
1/4-20UNC	P3	ZENBMRU04N	3P	62	11	15	26	33	6	4.5	7	3	1	¥ 3,650
1/4-28UNF	P3	ZENBMRU04K	3P	62	11	15	26	33	6	4.5	7	3	1	¥ 3,650
5/16-18UNC	P3	ZENBMRU05O	3P	70	-	12	-	36	6.2	5	8	3	2	¥ 5,130
5/16-24UNF	P3	ZENBMRU05M	3P	70	-	12	-	36	6.2	5	8	3	2	¥ 5,130
3/8-16UNC	P3	ZENBMRU06P	3P	75	-	13	-	38	7	5.5	8	3	2	¥ 6,570
3/8-24UNF	P3	ZENBMRU06M	3P	75	-	13	-	38	7	5.5	8	3	2	¥ 6,570
7/16-14UNC	P3	ZENBMRU07Q	3P	82	-	13	-	42	8.5	6.5	9	3	2	¥ 9,260
7/16-20UNF	P3	ZENBMRU07N	3P	82	-	13	-	42	8.5	6.5	9	3	2	¥ 9,260

Spiral Fluted Taps (for blind hole) Hand Taps | Spiral Pointed Taps | Spiral Fluted Taps | (for through hole) |

JIS

Carbide Taps

Roll Taps 6

Pipe Taps | Special Thread Taps | Simple Inspection Tools |

Thread Mills | OPPERIUM Thread Mills | Dies

10

Center Drills
Centering Tools

Precision Machinery/ | Medical Surgical Instruments |

1 Spiral Fluted Tap Series for blind hole

Overall length	Chamfer+ full thread	Thread length	Thread + Neck length	Shank length	Shank dia.	Size of square	Length of square
L	ℓt	l	ℓn	ls	Ds	K	ℓk

Spiral Pointed Taps Spiral Fluted Taps (for through hole)

10

Center Drills
Centering Tools

Precision Machinery/ Medical Surgical Instruments

ZEN-B Spiral Fluted Taps for Titanium Alloys

Size	Class	Code	Chamfer	L (mm)	ℓt (mm)	(mm)	ℓn (mm)	ℓs (mm)	Ds (mm)	K (mm)	ℓk (mm)	No. of flutes	TYPE	MSRP
1/2-13UNC	Р3	ZENBMRU08R	3P	88	-	15	-	45	10.5	8	11	3	2	¥ 9,820 **
1/2-20UNF	P3	ZENBMRU08N	3P	88	-	15	-	45	10.5	8	11	3	2	¥ 9,820 **
5/8-11UNC	Р3	ZENBMRU10U	3P	95	-	18	-	48	12.5	10	13	3	2	¥ 14,800 *
5/8-18UNF	P3	ZENBMRU10O	3P	95	-	14	-	48	12.5	10	13	3	2	¥ 14,800 *
3/4-10UNC	P4	ZENBMSU12V	3P	105	-	20	-	50	15	12	15	4	3	¥ 26,700 *
3/4-16UNF	P4	ZENBMSU12P	3P	105	-	14	-	50	15	12	15	4	3	¥ 26,700 *

Think threads with YAMAWA