

8 Pipe Tap Series

Overall length	Thread length	Shank length	Shank dia.	Size of square	Length of square
L	ℓ	ℓ_s	Ds	K	ℓ_k

DIN

①

Spiral Fluted Taps
(for blind hole)

②

Spiral Fluted Taps
(for through hole)

③

Spiral Pointed Taps
(for through hole)

④

Hand Taps

⑤

Cemented Carbide Taps

⑥

Roll Taps

⑦

Special Thread Taps
Simple Inspection Tools

⑧

Pipe Taps

⑨

Thread Mills
Premium Thread Mills

⑩

Dies

⑪

Center Drills
Centering Tools

⑫

Precision Machinery/
Medical Surgical Instruments

DIN

⑧-21

Z-PRO

AUSP Rp

Z-PRO

Coated Spiral Fluted Taps for Parallel Pipe Threads



Specification



Tapping Speeds depending on Materials

Low carbon steels
低炭素鋼
5~15
(m/min)

Medium carbon steels
中炭素鋼
5~15
(m/min)

High carbon steels
高炭素鋼
5~15
(m/min)


Alloy steels
合金鋼
5~15
(m/min)

Stainless steels
ステンレス鋼
~3
(m/min)

Aluminum alloy castings
アルミ合金鋳物
5~15
(m/min)

Zinc alloy castings
亜鉛合金鋳物
5~15
(m/min)

TYPE: 1

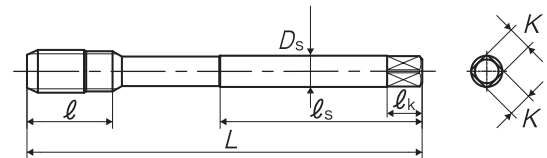

Segment : 1G

Size	Code	Chamfer	Basic major dia (mm)	L (mm)	ℓ (mm)	ℓ_s (mm)	Ds (mm)	K (mm)	ℓ_k (mm)	No. of flutes	TYPE
For Pipe Threads											
Rp 1/8-28	3119026004	C (2.5P)	9.728	90	19	46	7	5.5	8	3	1
Rp 1/4-19	3119026006	C (2.5P)	13.157	100	21	51	11	9	12	3	1
Rp 3/8-19	3119026008	C (2.5P)	16.662	100	21	51	12	9	12	3	1
Rp 1/2-14	3119026009	C (2.5P)	20.955	125	24	64	16	12	15	4	1
Rp 3/4-14	3119026011	C (2.5P)	26.441	140	27	71	20	16	19	4	1
Rp 1 -11	3119026013	C (2.5P)	33.249	160	29	82	25	20	23	4	1

Think threads with
YAMAWA

· This product is different from JIS products in shape and dimensions, please be careful when using.